


# Model:H-BC80

## ★Specifications


Nominal Voltage		1.2V	Final Discharge Voltage	1.0V
Nominal Capacity			80mAh (minimum at 0.1C/ 0.2C)	
Dimensions	Diameter		15.2±0.1 (mm)	
	Height		6.0±0.3 (mm)	
Weight Approx.			3.2 g	
Internal Impedance at 1000Hz.			Approx. ≤900 mΩ at after charge	
Charge	Standard		0.1C (8mA) for 14~16 hrs	
	Rapid		0.2C (16mA) for 8 hrs	
	Trickle		0.03C (2.4mA)	
Temperature Range for Operation (Humidity: Max 85%)	Charge	Standard	0~+45°C	
		Rapid	+10~+45°C	
	Discharge		-10~+45°C	
	Storage		-20~+45°C (less than 1 month)	

## ★Dimensions

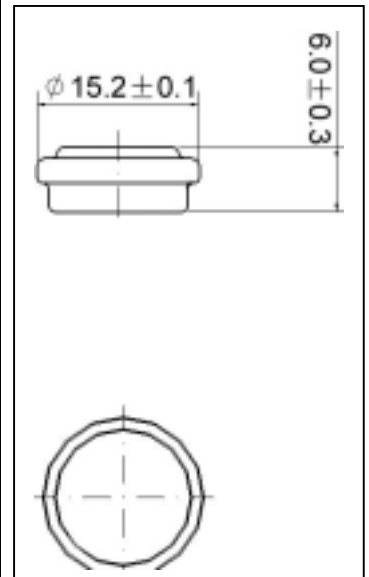


## ★Typical Characteristic


Typical Charge Curve (8mA)

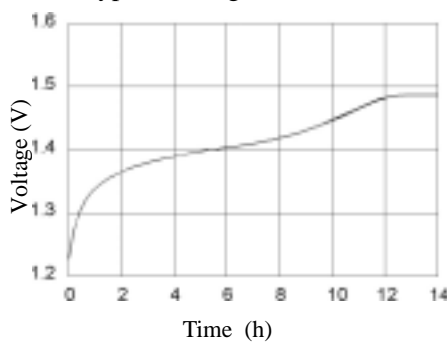


Typical Discharge Curve (16mA)

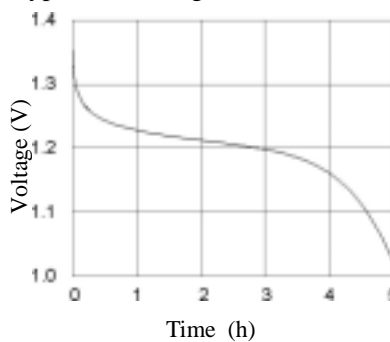


Cycle Life Curve

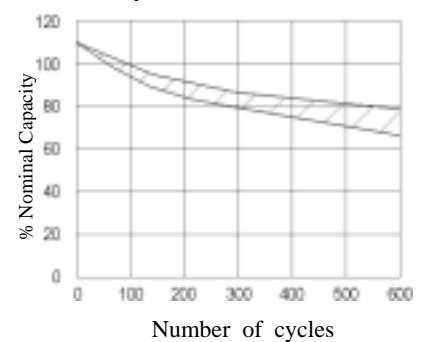

Typical Charge Curve at Various Currents

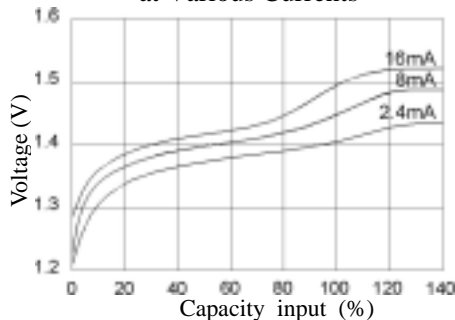

Discharge Curve at Various Temperatures (16mA)

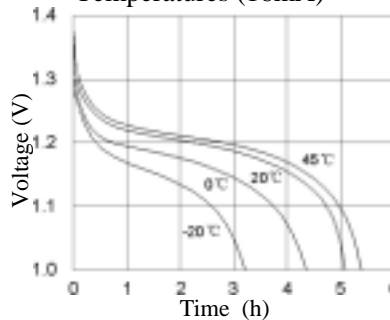

Self-Discharge Rate at Various Temperatures

