


L-P063465S


Specifications

Nominal Voltage		3.7V	
Capacity ¹ (mAh)	0.2C Discharge		
	Minimum	1140mAh	
	Typical ³	1250mAh	
Dimen- Sions	Thickness	mm	inch
		6.5 ⁰ _{-0.4}	0.256 ⁰ _{-0.016}
		Width	34.0 ⁰ _{-0.5}
	Height	65.0 ⁰ _{-0.6}	2.559 ⁰ _{-0.024}
Weight [*]		Grams	Ounces
		43	1.55
Internal impedance [*] at 1000Hz		<60 mΩ (After charge)	
Charge	Standard	650mA(0.5C)×5hrs	
	Rapid	1250mA(1C)×2.5hrs	
Ambient temperature	Charge	°C	°F
		0°C to 45°C	32°F to 113°F
	Discharge	-20°C to 60°C -4°F to 140°F	
	Storage	-20°C to 45°C -4°F to 113°F	


Charge characteristics

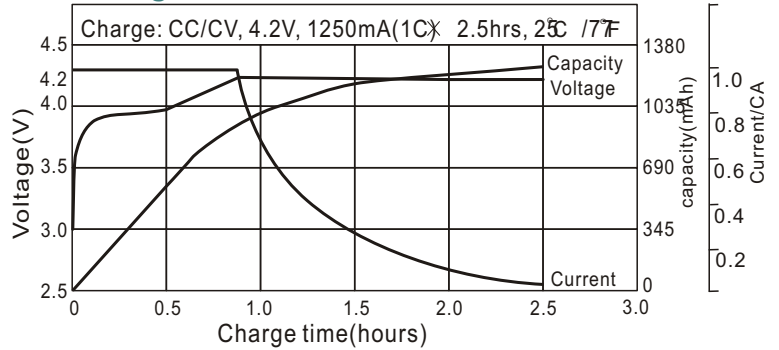


Discharge temperature characteristics

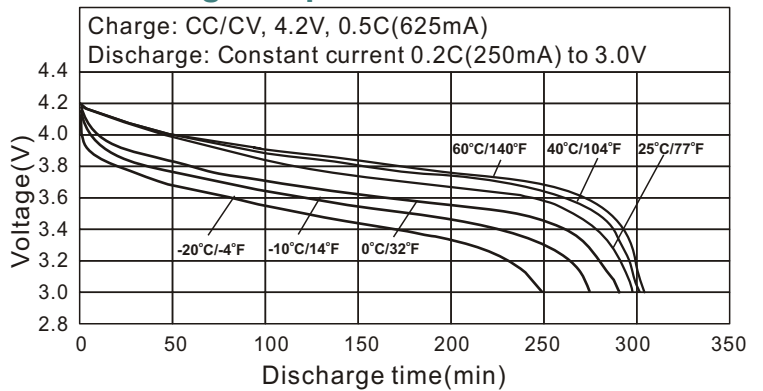


Dimensions(bare cell)

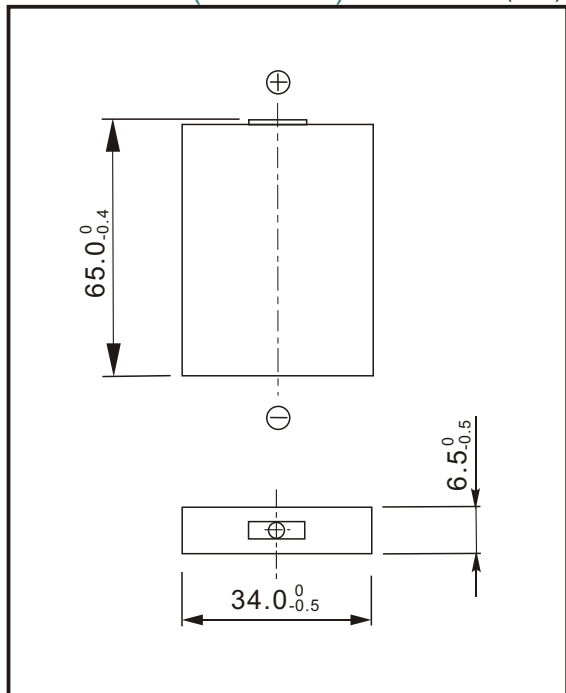

Cycle life characteristics

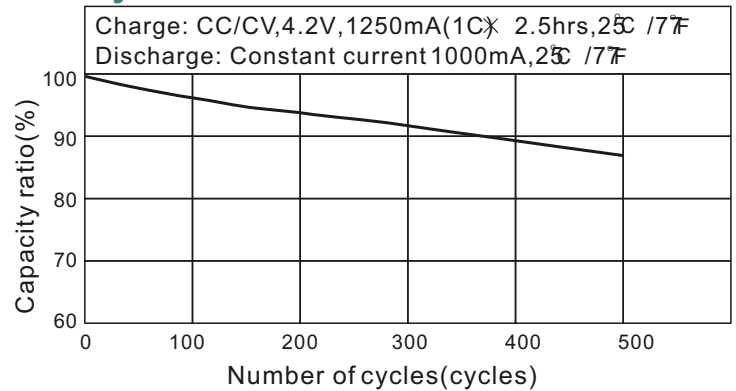

Storage characteristic

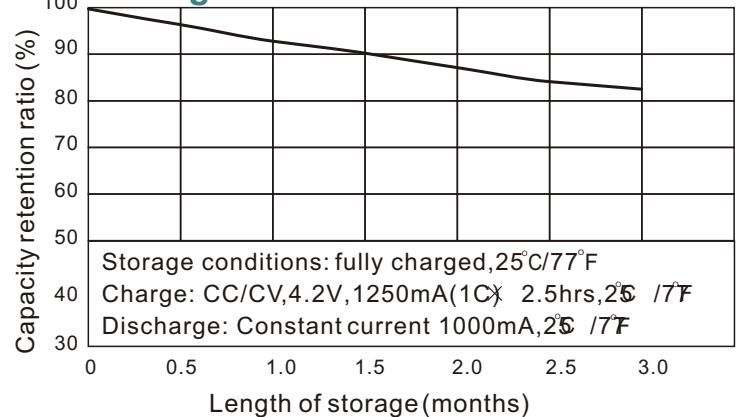

Note:

- After charging at 1C for 2.5 hours.
 - Nominal capacity, rated at 0.2C, 25°C/77°F.
 - Average capacity. For reference only.
- *. Weight and internal impedance are for reference.