


# Model: H-AA1300K

## ★ Specifications


Nominal Voltage	1.2 V	Final Discharge Voltage	1.0 V
Dimension of Production (with tube)	D(Diameter)	14.5 <sup>+0.0</sup> <sub>-0.7</sub> mm	
	C(Top)	4.8 ± 0.2 mm	
	H(Height)	50.5 <sup>+0.0</sup> <sub>-1.0</sub> mm	
Capacity	Nominal	1300 mAh (minimum at 0.1C/0.2)	
	Typical	1170 mAh (minimum at 0.1C/1C)	
Charging	Standard	0.1C (130mA) for 14~16 hrs	
	High Rate	1C (1300 mA) for approx. 1.2 hrs	
Temperature Range for Operation (Humidity: Max 85%)	Standard Charge	0 ~ +45 °C	
	Rapid Charge	+10 ~ +45 °C	
	Discharge	-20 ~ +60 °C	
	Storage	-20 ~ +55 °C (less than 1 month)	
-20 ~ +35 °C (less than 1 year)			
Internal Impedance at 1000Hz	Approx. 20 mΩ at after charge		
Weight	26.0g	Service Life	≥ 500 cycles

## ★ Construction

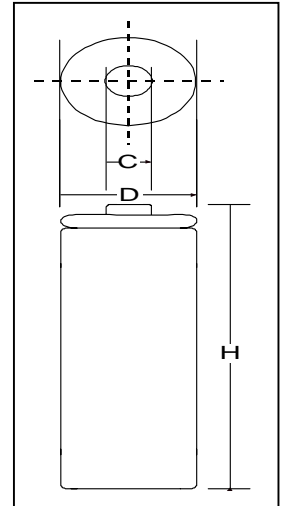


## ★ Typical Characteristics


Typical Discharge Curve (@23°C)

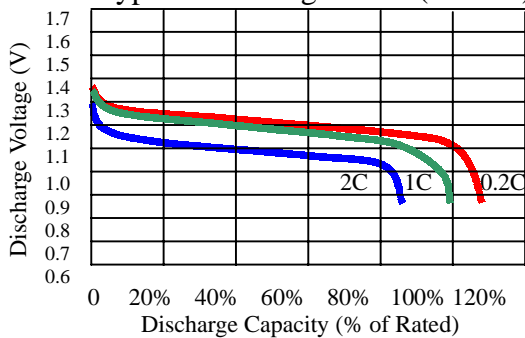


Typical Effect of Discharge Rate on Actual Capacity

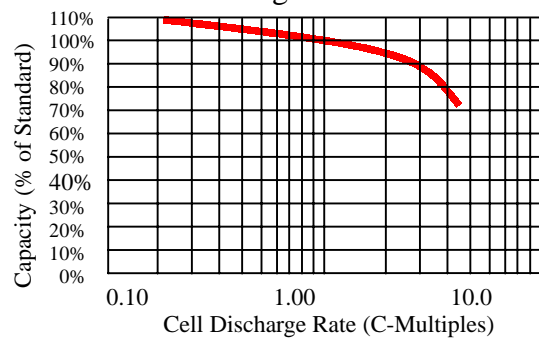


Typical Charge Curve (@ 23°C)

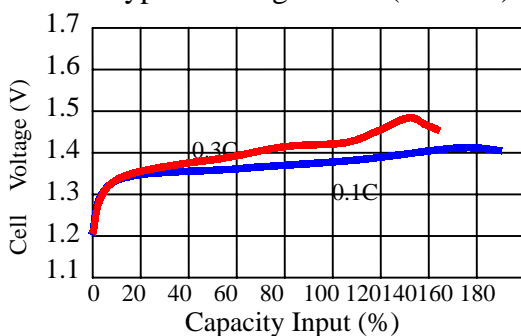


Typical Effect of Discharge Temperature on Actual Capacity

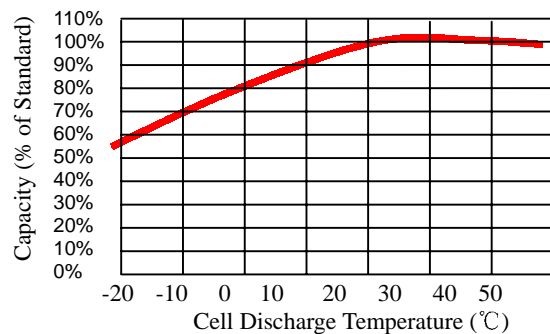

Typical Effect of Cell Discharge Temperature on Voltage-MPV

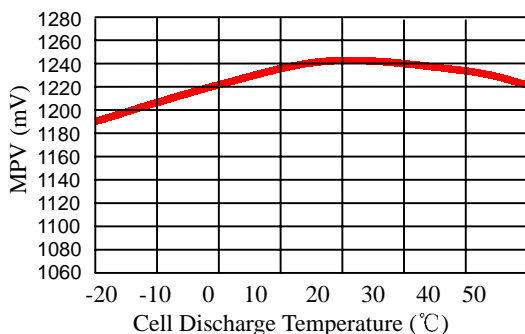

Typical Effect of Cell Charge Temperature on Actual Capacity

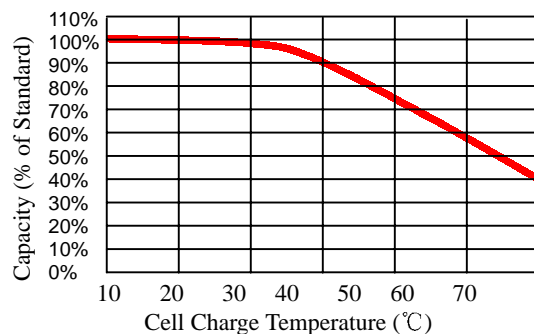

\*Weight , Service Life and Internal Impedance are for reference.